


NEW GYMFIT 65 | 60 | 50

- Light weight and flexibility; Available in rolls > Easy and quick installation
- 2 m wide rolls > Less welding and joints

GYMFIT 65
GYMFIT 60
GYMFIT 50


- A** X-PUR SURFACE wear layer
- B** Glass fiber reinforcement
- C** Combined foam backing

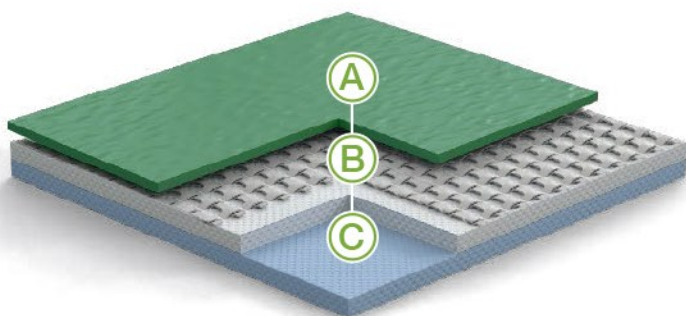

X PUR THE NEW GENERATION OF POLYURETHANE SURFACES

Grabo's new surface treatment combines state-of-the-art technology with a customized, special lacquer formula. With several months of development work, our engineering team has developed lacquer formulas that best meets the specific requirements of each application. This results in excellent chemical resistance, very easy cleaning and outstanding scuff resistance of our sports floor products.

Without surface treatment

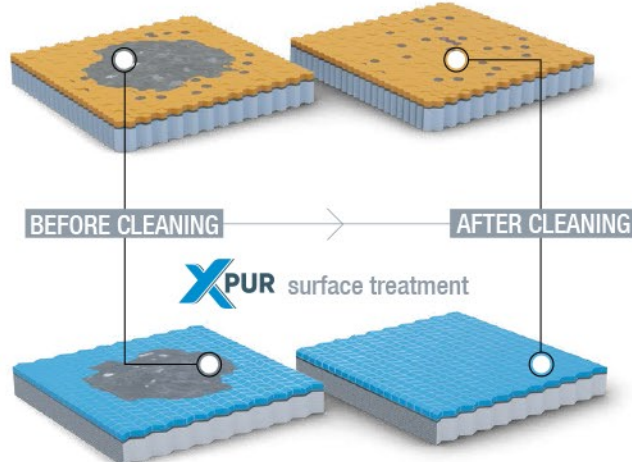


TECHNICAL PARAMETERS			Gymfit 65	Gymfit 60	Gymfit 50
Thickness	mm	EN ISO 24346	6.5	6.0	5.0
Weight	kg/m ²	EN ISO 23997	3.6	3.5	2.9
Width	m	EN ISO 24341	2	2	2
Standard roll length	m	EN ISO 24341	20	15	20



Graboplast
Floor Covering Manufacturers Ltd.
H-9023 Győr, Fehérvári út 16/b.
Telefon: (+36) 96 506-100
www.graboplast.hu
www.facebook.com/graboplast


NEW

GYMFIT 65 | 60 | 50

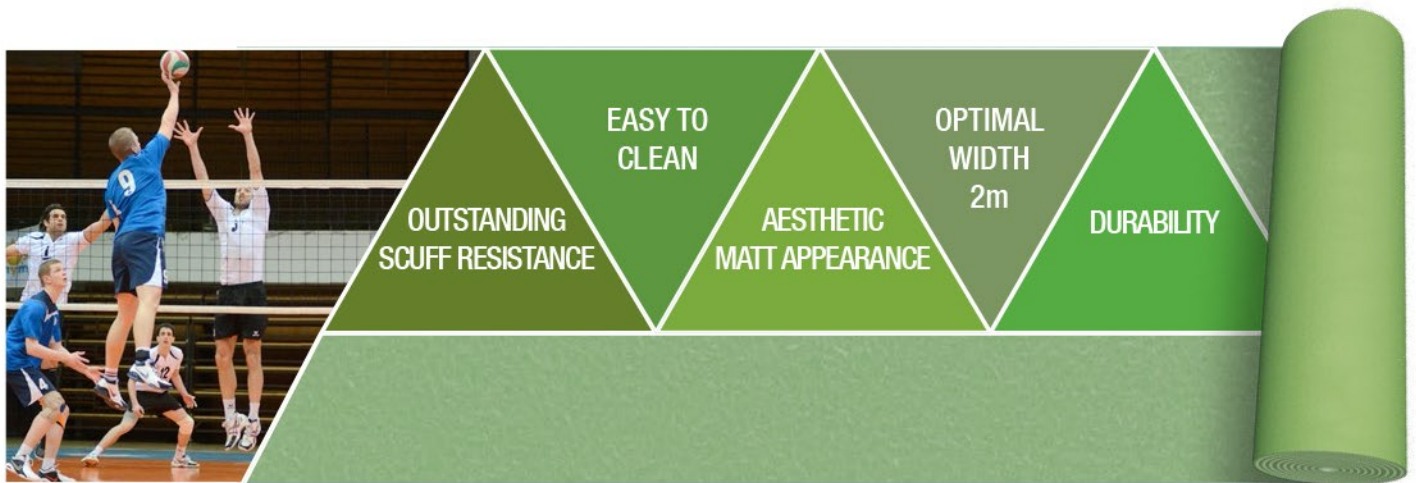


NEW

AVAILABLE COLORS

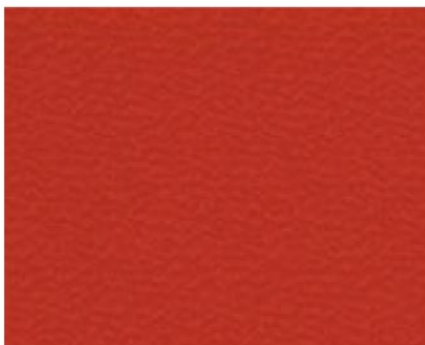

5016

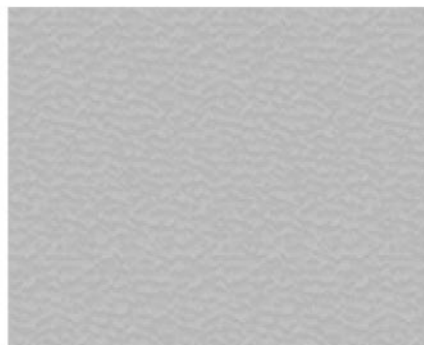


1360




6215



7338

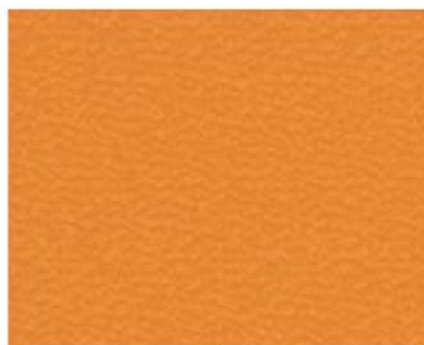

3338

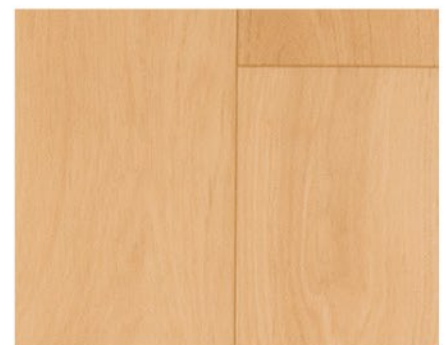

2519-371